
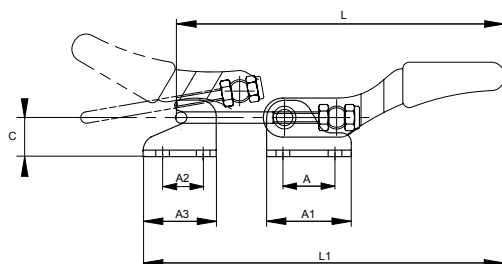
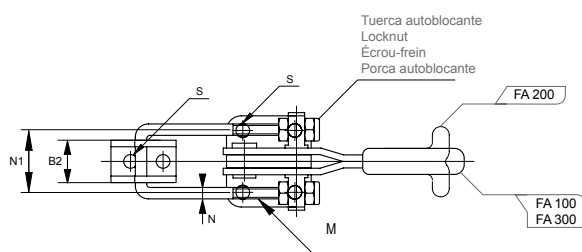


Series FA (100 · 200 · 300)



Brida de tirante y cierre

Pull/fasten action, lacht type

Sauterelle à tirant avec plaque de verrouillage

Garra de haste e fecho

Material: Acero cincado / Acero inox 304

Material: Zinc plated steel / Stainless steel 304

Matériau: Acier zingué / Acier inoxydable 304

Material: Aço zincado / Aço inoxidável 304

Remaches en acero inoxidable

Stainless steel rivets

Rivets en acier inoxydable

Rebites em aço inoxidável

Empuñadura: vinilo color rojo

Red vinyl handle grip

Poignée de vinyle rouge

Punho: vinil de cor vermelha

· Bridas de sujeción por tracción ideales para tareas ligeras y medias. Todos los modelos se suministran con base de anclaje.

· Pull action clamps. Ideal for light and medium duty application. Each model furnished with latch plate.

· Idéale pour des applications légères et moyennes. Chaque modèle est fourni avec une plaque de verrouillage.

· Garras de fixação por tração ideais para tarefas ligeiras e médias. Todos os modelos são fornecidos com base de fixação.

(ES) (EN) (FR) (PT)

Modelo

Model

Modèle

Modelo

F_{max}. Fuerza de sujeción

Holding capacity

Capacité de serrage

Força de fixação

Recorrido

Drawing movement

Course

Percurso

Peso

Weight

Poids

Peso

Ref.	Modelo	A	A1	A2	A3	B	B1	B2	C	H	L	L1 min.	L1 max.	M	N	N1	S	F _{max}	gr.	
KKFA-100	FA 100	16,0	26,0	10,0	20	19	27,8	13,0	12,0	29,0	101,0	96,0	108,5	M4 (x0,7)	3,5	19,0	4,2	106 Kg	70	29,0
KKFA-200	FA 200	19,0	41,0	14,3	26	32	44,5	17,5	16,0	49,8	148,4	144,4	159,4	M5 (x0,8)	4,8	25,4	6,8	320 Kg	215	40,5
KKFA-300	FA 300	41,3	60,5	19,0	38	38	54,0	30,2	23,4	75,0	215,0	211,0	230,0	M8 (x1,25)	7,9	44,5	8,5	900 Kg	620	63,0

INOX

Ref.	Modelo	A	A1	A2	A3	B	B1	B2	C	H	L	L1 min.	L1 max.	M	N	N1	S	F _{max}	gr.	
KKFAI-1002S	FA 100-2S	16,0	26,0	10,0	20	19	27,8	13,0	12,0	29,0	101,0	96,0	108,5	M4 (x0,7)	3,5	19,0	4,2	106 Kg	70	29,0
KKFAI-2002S	FA 200-2S	19,0	41,0	14,3	26	32	44,5	17,5	16,0	49,8	148,4	144,4	159,4	M5 (x0,8)	4,8	25,4	6,8	320 Kg	215	40,5
KKFAI-3002S	FA 300-2S	41,3	60,5	19,0	38	38	54,0	30,2	23,4	75,0	215,0	211,0	230,0	M8 (x1,25)	7,9	44,5	8,5	900 Kg	620	63,0